

i23 IP Intercom




i23 IP Voice & Access Intercom



Main Features

- > Compatible with standard SIP (RFC3261) protocol and main IPPBX/IMS platform.
- > Access Control (by call, by code, IC/RFID)
- > All-in-One (Access Control, Intercom and Broadcasting)
- > Build-in noise reduction DSP to reduce noise effectively.
- > Build-in 3W speaker and AEC, supports high quality hands-free communication.
- > Supports external active speaker output port for HD quality (G.722) broadcasting
- > Build-in tamper-proof detector to deter vandalism
- > System online maintenance and management

Dimension

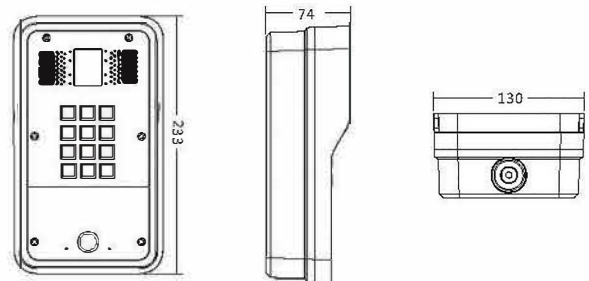

(Unit:mm)

Specification

Power Supply	DC/12V or POE 802.3af/at
Speaker	3W
Protocol	TCP、UDP、RTP/RTCP/SRTP、IGMP、STUN
Installation and Material	Wall mounted or Flush mounted ; Front plate: aluminum alloy, Back plate: Cast aluminum
Protection Level	IP65 and IK10
RFID Card	EM4100(125kHz) or Mifare 1 ; Maximum support 500 cards
Port	2 RJ45 port, 1 Electric-lock output, 1 indoor switch connector
Temperature and Humidity	-40°C ~ 70°C; ≤90%RH
Dimension and Weight	233x130x74 mm(WxHxL); 1.85KG

Installation Diagram

